

pewiSYS

material handling

Load- & unloading system
Box & bags handling system
Pallet handling system
Floor chain transport system
Others

pewiLOAD™ mobile belt conveyor



pewiLOAD™


Cost-saving features:

- Efficient working use increases labour productivity
- High safety and good working conditions
- Movability,
- Adjustable length
- Suitable for use at loading bays



Specifications pewiLOAD™

- Useful width 500 mm
- Outside measurement frame 580 mm
- Length 12,670 mm
- Drum motor: diameter 165 mm, with Laminop
- Motor power: 1.1 kW
- Belt speed: 24 m/min, 230/400 V, 50 Hz
- Material of belt: Pvc with 2 layers of fabric
- Guide rollers in return part
- 2 x 13 m wheel guides with guide edges L60/40/3
- Photo cell at the start of conveyor activates conveyor belt at enable signal
- Construction has longitudinal and lateral stability, necessary if floor is not even with loading platform
- Drawbar is also safety bar at the beginning of the belt conveyor
- Load capacity 50 kg/m
- Wheels Ø125 mm, with foot brakes
- Wheels are made of nylon to facilitate the mobility of the pewiLOAD™
- Cable reel with special plug and connector
- Cabling with strain relief
- Guide rails on floor to guide telescopic belt conveyor
- Colour RAL 5015, wheel guides RAL 7001

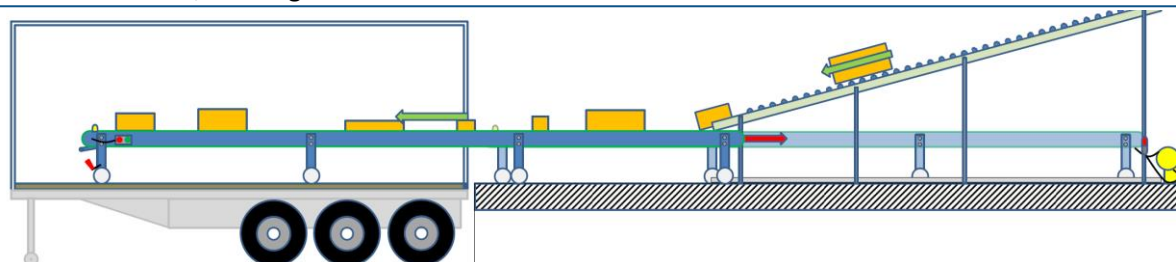

www.pewisys.nl


pewiSYS material
handling bv

Kalkoenweg 40
3851 SC Ermelo
The Netherlands

T +31 (0) 341 76 81 10
F +31 (0) 241 55 01 25

E info@pewisys.nl
W www.pewisys.nl

Options pewiLOAD™

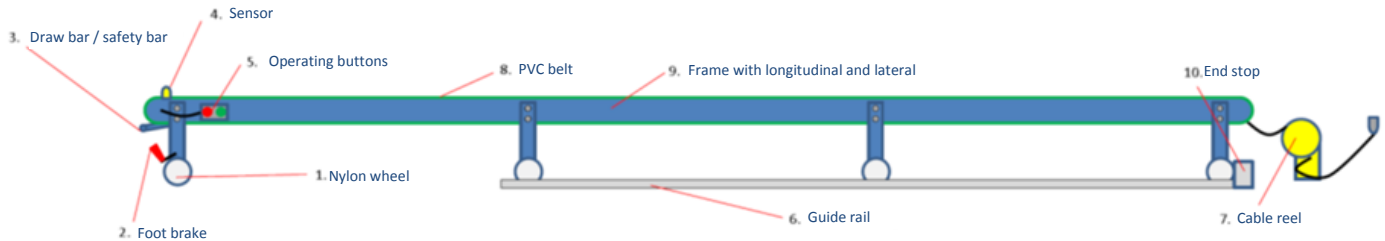

- Length
- Belt width
- RAL colour
- Side guiding
- If required, to be used as a loading and unloading system in which the infeed and outfeed system consist of a belt conveyor



Foot brake



Cable reel



Cabling with strain relief



Operating buttons