

pewiSYS

**materiAL
handling**

Load- & unloading system
Box & bags handling system
Pallet handling system
Floor chain transport system
Others



pewiROLL-HD™ mobile telescopic roller conveyor (NA)

Advantages pewiLOAD™


Cost-saving features:

- Efficient working use increases labour productivity
- High safety and good working conditions
- Movability
- Adjustable height
- Adjustable length
- No power drive, so no energy cost
- Suitable for use at loading bays and from A to B



Specifications pewiLOAD™

- Useful width 500 mm, 600 mm or 700 mm
- Sturdy welded construction, heavy-duty roller section
- Ø50 mm high impact PVC roll
- Distance 65 mm
- Ø20 mm roller, galvanised steel at transfer sections
- Ø50 mm roller, as guide rollers between sections
- Extra support for rollers at transfer sections
- Heavy duty sliding system between sections
- Adjustable height at each transfer section (frame)
- Load capacity 50 kg/m
- Standard with drawing bar and end stop
- Wheels Ø150mm, with foot brakes on each frame
- Wheels are covered with nylon to facilitate the mobility of the pewiROLL-HD™

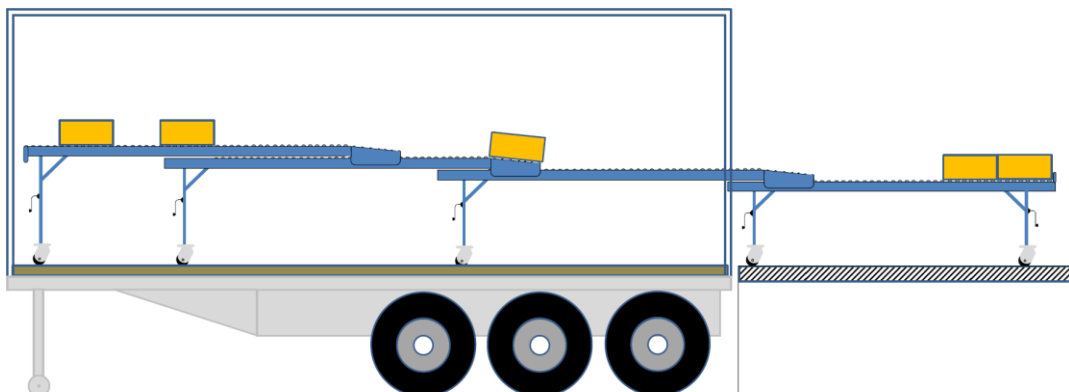

www.pewisys.nl

pewiSYS materiAL
handling bv


Kalkoenweg 40
3851 SC Ermelo
The Netherlands

T +31 (0) 341 76 81 10
F +31 (0) 241 55 01 25

E info@pewisys.nl
W www.pewisys.nl

Options pewiROLL-HD™

- End stop
- Connecting hook
- Stainless steel bearings for humid environments

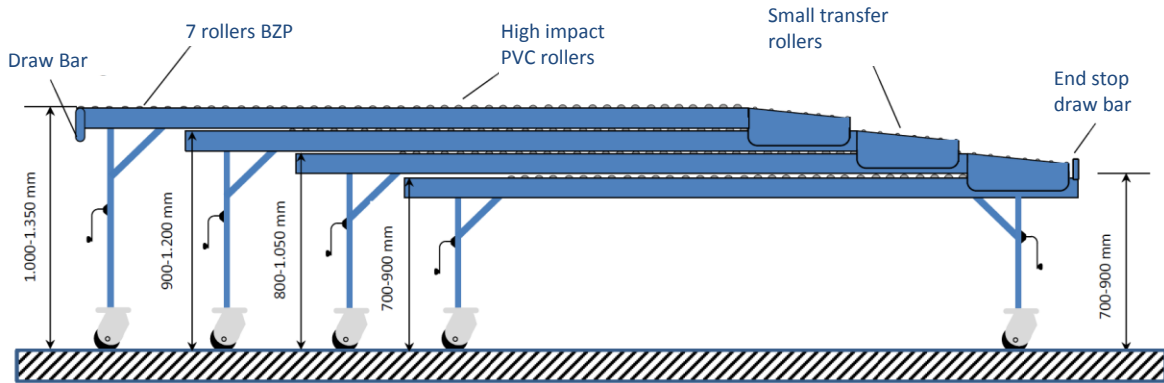

	TYPE	Compact length	Max. length	Number of sections
500 mm	Rollh 500-4000	2.53 m	4.00 m	2
	Rollh 500-6000	2.97 m	6.00 m	3
	Rollh 500-8000	3.41 m	8.00 m	4
	Rollh 500-9000	3.95 m	9.00 m	3
	Rollh 500-12000	4.39 m	12.00 m	4
	Rollh 500-15000	5.17 m	15.00 m	4
600 mm	Rollh 600-4000	2.53 m	4.00 m	2
	Rollh 600-6000	2.97 m	6.00 m	3
	Rollh 600-8000	3.41 m	8.00 m	4
	Rollh 600-9000	3.95 m	9.00 m	3
	Rollh 600-12000	4.39 m	12.00 m	4
	Rollh 600-15000	5.17 m	15.00 m	4
700 mm	Rollh 700-4000	2.53 m	4.00 m	2
	Rollh 700-6000	2.97 m	6.00 m	3
	Rollh 700-8000	3.41 m	8.00 m	4
	Rollh 700-9000	3.95 m	9.00 m	3
	Rollh 700-12000	4.39 m	12.00 m	4
	Rollh 700-15000	5.17 m	15.00 m	4



Heavy duty roller section



Heavy duty transfer